

Non-metallic Flat Gasket
CAZ- G+sheet style

Industrial Gasket

CONSTRUCTION:



CAZseal can offer you various non-metallic flat gaskets, made from Asbestos, non-asbestos, Graphite, reinforced graphite, PTFE, improved PTFE, mica, and various rubber sheets etc. They are used in a large number by various industries and in a variety of applications. Available are standard and nonstandard gasket design. Non-standard means gaskets can be optional shapes and dimensions according to customer design or sample.

MATERIALS & APPLICATION:

Materials	Style	Pressure Mpa	Tempt. °C
Rubber	460-NBR,SBR, CR, EPDM,VITON	2.0	120
Cork	470,470R	2.0	150
Asbestos-rubber CAF	412,413,414,415,415G,415MG	2.0	450
Oil-resisting Asb	412RO...415RO,415ROG	2.0	300
Acid-Resisting Asb	412AC,413AC,414AC	2.0	250
Mica	480,480T, 482, 482H	2.0~5.0	650
Non-asbestos/NCAF	432,433,434	2.0~5.0	300
Oil-resisting NCAF	432RO,433RO,434RO	2.0~5.0	300
PTFE	450,450F,EX450	2.0~5.0	250
Graphite	440,440P,440T,440M	5.0~11.0	500

Above Pressure & Temperature only for your reference, more specifications, please see to our data sheets or contact our engineers.


More non-metallic gasket sheets with brands Klinger, Garlock, Valqua, Gore, Econosto etc in stock.

Other special materials, Braided cloth or tape with materials Glassfiber, asbestos and ceramic are also can be made into various gaskets



DIMENSION:

ASME B16.21, DIN2690, and any sizes any special shapes according to your requirement.

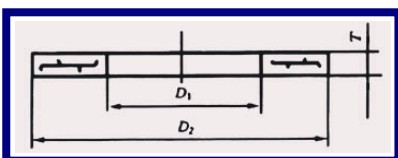

Order example:

G434RO , ASME B16.21, RF, 2mm

Made from Non-asbestos sheet with CAZ style 434RO

Dimension is based or ASME B16.21 RF flange, thickness is 2 mm **(Note: FF flange, gaskets normal with holes)**